

P3C004

ON

No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish
①	インシュレータ Insulator	1	PBT ガラス繊維入り UL94V-0 色:黒 Glass-filled PBT UL94V-0 Color:Black	
②	#570-□	極数 No. of contacts	銅合金 Copper alloy	SEE NOTE2



F	E	D	C	B	A	極数 No. of contacts
15.7	5.0	15.3	18.7	32.7	43.2	6
18.2	7.5	17.8	21.2	35.2	45.7	8
23.2	12.5	22.8	26.2	40.2	50.7	12
28.2	17.5	27.8	31.2	45.2	55.7	16
33.2	22.5	32.8	36.2	50.2	60.7	20
38.2	27.5	37.8	41.2	55.2	65.7	24
50.7	40.0	50.3	53.7	67.7	78.2	34
55.7	45.0	55.3	58.7	72.7	83.2	38
58.2	47.5	57.8	61.2	75.2	85.7	40

NOTES


- 指定なき寸法公差
Unless otherwise specified, tolerance shall be
0~10未満 ± 0.2 / Less than 10 ± 0.2
10~50未満 ± 0.25 / 10 to Less than 50 ± 0.25
50以上 ± 0.3 / 50 or more ± 0.3
- #570-□仕上/finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき(0.1 μ m以上)
Contact area/Gold plating(0.1 μ m or more)
圧着部/錫めっき(1 μ m以上)
Crimp area/Tin plating(1 μ m or more)
- 本コネクタ適合コンタクト、ケーブル/Applicable contact and cable

コンタクト Contact	図面番号 Drawing number	AWG	ケーブル被覆外径 Insulation Dia.
#570	P3C007	22~26	$\phi 1.00 \sim 1.70$
#570-1	P3C310	26, 28	$\phi 0.88 \sim 1.32$
- 品名/Part name
FA12-□□□
極数/Number of contacts
シリーズ名/Series name
活線ピン有り/Hot swap type
- ネジの仕様/Applicable screw
取付はM3(座面が平らなタイプ)とし、締付けトルクは0.5~0.7N・mを推奨する。
Size:M3 (Bedring surface:Flat type)
Tightening torque:0.5~0.7N・m
- 活線位置はA1、An/2の2箇所である。(n=極数)
Hot swap position are A1, An/2 contacts(n=Number of contacts)


製造国名/Producing country
(刻印サイズ/Size:1.5X4)

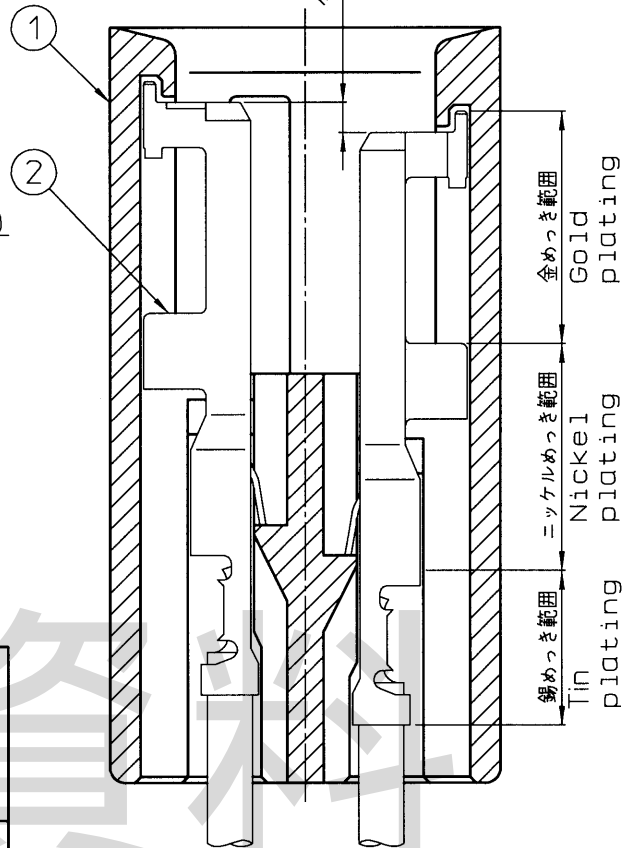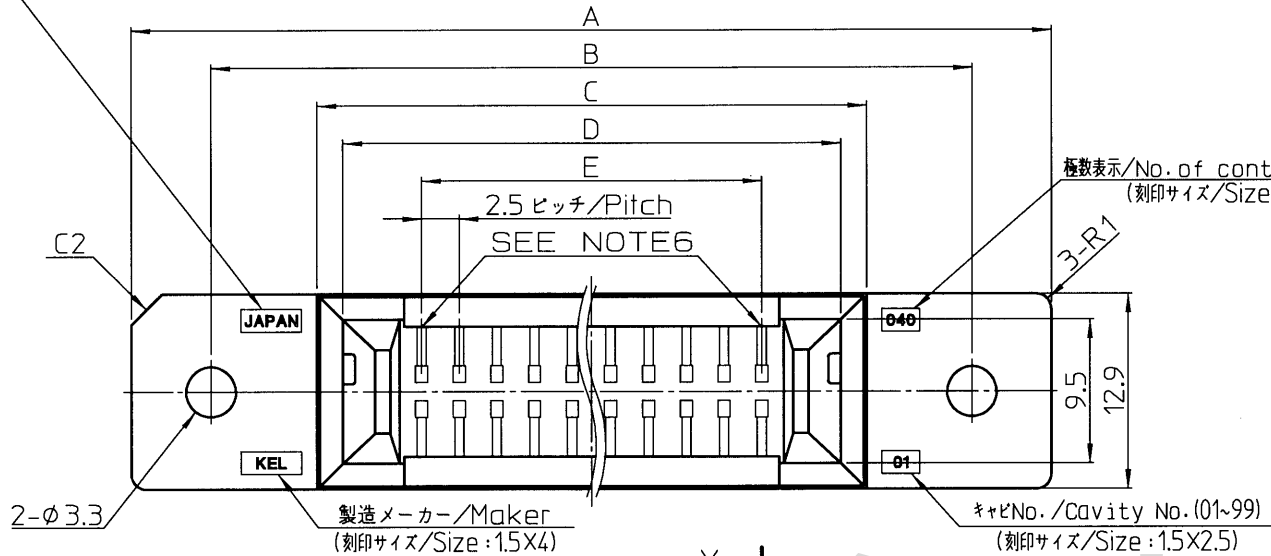


X-X'断面/Cross-section(4:1)
#570-□挿入時/Inserted

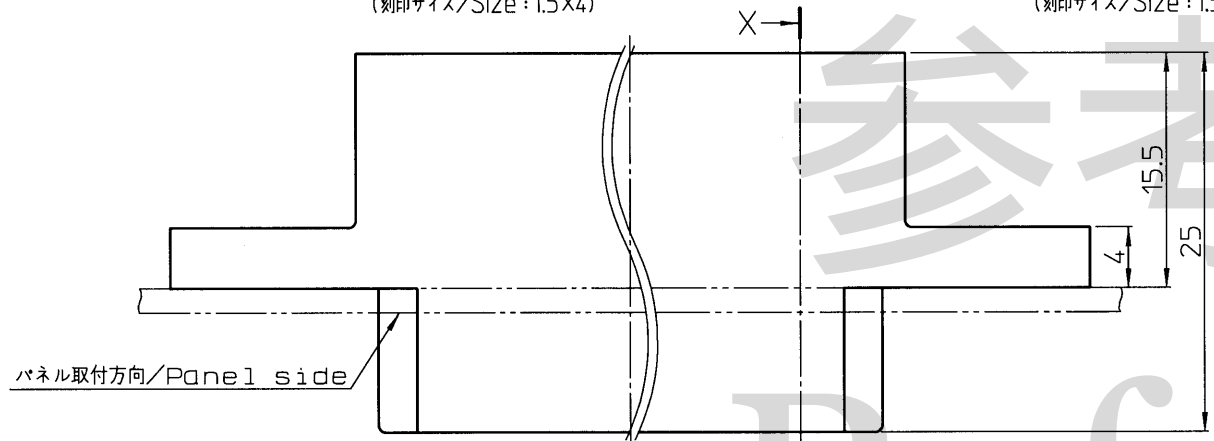

列表示/B row side
(刻印サイズ/Size:1X1.5)

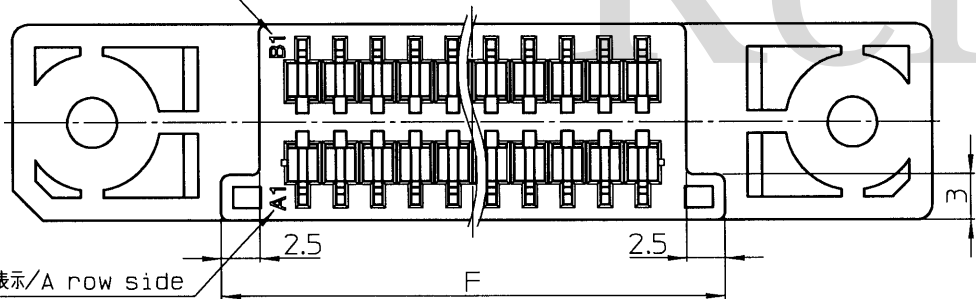

列表示/A row side
(刻印サイズ/Size:1X1.5)

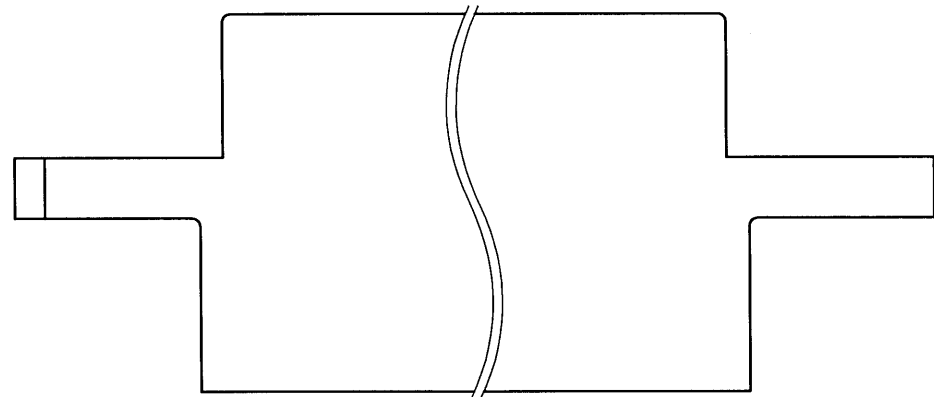

参考パネル設計要領(コネクタ搭載面)
A reference drawing of panel(connector mounting side)

△ ×									
△ ×									
Dec.10,2020	n. Sugita	S. Takao	Y. Aoki	英文、背面図追加の為、改版。/Add English and Rear view.					
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION					
THIRD ANGLE PROJECTION 	DRAWN BY T.Morikami	DATE Oct.22,2009	CHECKED BY N.Sugita	DATE Oct.22,2009	APPROVED BY A.Shimada	DATE Oct.22,2009	SCALE 2:1	UNIT mm	
MATERIAL	TITLE				KEL CORPORATION				
FINISH	FA12-□□□				DRAWING No.			P3C004	REVISION 4